


iNFINITI M1D1-T Line Card

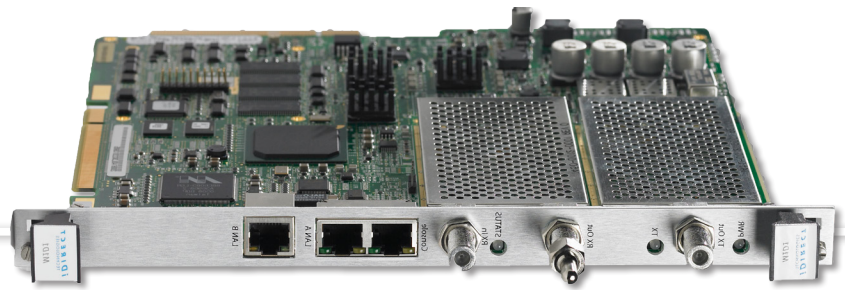

The iNFINITI M1D1-T line card is suited for supporting secure communication links for mission-critical military broadband applications with FIPS-Certified TRANSEC Security. The line card features one modulator and one demodulator making network expansion easy.

Network Configuration

Modem	One Modulator (Transmit one downstream carrier) One Demodulator (Receive one upstream carrier)
Symbol Rates	Downstream (TDM): Up to 15 Msps Upstream (D-TDMA): Up to 7 Msps
Modulation	Downstream (TDM): BPSK, QPSK, 8PSK Upstream (D-TDMA): BPSK, QPSK, 8PSK
Max Info Rate	Downstream (TDM): Up to 18 Mbps Upstream (D-TDMA): Up to 11.8 Mbps
Max IP Data Rate	Downstream (TDM): Up to 17.6 Mbps (when using QPSK, 0.879FEC) Upstream (D-TDMA): Up to 10.8 Mbps (when using QPSK, 0.793FEC, unrestricted NMS)
FEC	Downstream: TPC BPSK .495-.879, QPSK .495-.879, 8-PSK .793-.879 Upstream: TPC* BPSK .431-.793, QPSK .533-.793, 8PSK .660
Interoperability	Compatible with Series 15000 Universal Hub (5IF/20Slot) chassis and Series 12100 Universal Hub (Commercial 4-slot) chassis Requires iNFINITI Series 7350 or 8350 remotes

Interfaces

SatCom Interfaces	TxIF: Type-F, 950-1700 MHz, +7dBm/-35dBm RxIF: Type-F, 950-1700 MHz, -5dBm/-65dBm
Data Interfaces	LAN: RJ-45, two 10/100Base-T RS-232: RJ45 (Console connection)
Security	TRANSEC with FIPS 140-2 certification

Mechanical/Environmental

Redundancy	Software Controlled, Hot-swappable
Weight	~1.2 lbs (0.6 Kg)
Operating Temperature	0 to 45°C (32° to 113°F)
Radio Standards (System Level)	EN 301-428 v1.3.1 — Ku-Band System Level Specification EN 301-443 v1.3.1 — C-Band System Level Specification
Safety Standards (System Level)	Complies with IEC 60950, EN 60950-1, UL 60950-1, CSA C22.2 No.60950-1-03
Emission Standard (System Level)	Complies with EN 55022 Class A, FCC Part 15 Class A, CISPR 22 Class A, EN 61000-3-2, EN 61000-3-3
EMC/Immunity Standard (System Level)	Complies with EN 55024, EN 301-489-1, EN 301-489-12, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-11
Certification	FCC, CE, and RoHS Compliant

* Not supported for use with DVB-S2 outbound in iDX 3.0 and above