

ALB130 Series

Lite 8W/12W/16W Ku Band
Block-Up Converter

Designed to mount directly to the feedhorn, ideal for SOTM, fixed and maritime applications with option of IFL powered directly through modem via MS connector.

Innovative and excellent efficiency thermal design makes this BUC one of the most power efficient, robust and reliable to operate under harsh outdoor environment.

Easy installation with redundancy ready features to work in 1+1 redundancy mode.

Features

- Feed mountable
- Forward power detection
- Monitoring and Control through Serial and Ethernet ports
- Fault identification and alarm generation
- LED status and alarm indicator
- Auto gain control throughout operating temperature
- Auto input DC voltage ranging 38 to 60Vdc
- Wide operating temperature -40°C to +60°C
- IP65 Weatherproof
- RoHS Compliant

Quality Assurance

100% thorough stringent quality checks in addition to well-defined Electrical Stress Screening to ensure operation in harsh outdoor environment conditions. All subjected to seal test for water ingress verification.

Reliability

Field proven under harsh environment conditions. Agilis ODUs can withstand temperature ranging from -40°C to +60°C under 100% humidity.

ALB130 Series

Lite 8W/12W/16W Ku Band
Block-Up Converter



Technical Specifications

RF Specifications

Freq Band	Transmit	IF	LO
Standard	14.00 – 14.50GHz	950 – 1450MHz	13.05GHz
Extended	13.75 – 14.50GHz	950 – 1700MHz	12.80GHz

Output Power	P _{1dB}	P _{linear}
8W	39.0dBm (8W)	36.0dBm (4W)
12W	40.8dBm (12W)	37.8dBm (6W)
16W	42.0dBm (16W)	39.0dBm (8W)

Small Signal Gain	64dB min (8W/12W) 68dB min (16W)
Gain Flatness	±2dB within band ±1dB over 40MHz
Gain Variation	±2dB within band over operating temperature
Intermodulation	-25dBc max @ P _{linear}
Spurious	According to EN 301 428
Phase Noise	-93dBc/Hz max @100KHz offset -83dBc/Hz max @10KHz offset -73dBc/Hz max @1KHz offset
VSWR	1.5:1 max @input 1.25:1 max @output with optional external isolator
Noise Power Density	Tx Band : -70dBW/4KHz max Rx Band : -142dBW/4KHz max

AC/DC Power

Prime Power	38 to 60Vdc Auto Range
Power Consumption	96VA @8W 150VA @16W

Interface

IF Input	N-Type Female 50Ω F-Type Female 75Ω (option)
RF Output	WR75 Square Grooved

Reference Requirement

Frequency	10MHz
Power Level	-5dBm to +5dBm
Ext Ref Phase Noise	-155dBc/Hz max @100KHz offset -145dBc/Hz max @10KHz offset -135dBc/Hz max @1KHz offset

Monitor & Control

Monitor	BUC Temperature Status Alarm LED Indicator LO Unlock Alarm RF Forward Power Detection
Control	Gain adjustable 20dB with 0.5dB step RF Output On/Mute
Communication Port	Serial RS232/RS485 Ethernet (SNMP & HTTP)
Transmit Redundancy	Redundancy-Ready (with external controller unit)

Environmental

Operating Temperature	-40°C to +60°C
Relative Humidity	Up to 100%
Weatherproof	IP65

Mechanical

Dimension (excluding interface connectors)	L158 x W93 x H92mm L6.22" x W3.66" x H3.62"
Weight	1.5Kg / 3.3lbs

NOTE: All specifications subject to change without notice
200330

ALB130 Series

Lite 8W/12W/16W Ku Band Block-Up Converter

Standard Part List for Standalone Configuration

ITEM	PRODUCT NAME	OPTION	PART NUMBER	QTY	DESCRIPTION
1	BUC			01	BUC
2	Prime Power Input Cable	Non-IFL	2502041875	01	C/A PS 7-3P to Unterminated 3M
3	Cable M&C	RS232	2502040500	01	C/A M&C 232 12-8P to DB9 (F) 3M
	Cable M&C	RS485	2502041169	01	C/A M&C 485/ETH 12-8P to DB9 (F) 2M
4	Cable M&C	ETH	2502041166	01	C/A M&C ETH/RJ45 DB9 (M) to RJ45 2M
5	Converter – USB/485	RS485	6103480008	01	Converter USB to RS485
6	Mounting Accessory Set			01	Mounting screws including brackets and gasket for flange WR75


Option Items

ITEM	PRODUCT NAME	OPTION	PART NUMBER	DESCRIPTION
1	WG Flexible	0.6M	4203490010	Flexible WG Ku band WR75 Sq Grooved to WR75 Sq Cover 0.6M
		1.0M	4203490049	Flexible WG Ku band WR75 Sq Grooved to WR75 Sq Cover 1.0M
		1.5M	4203490014	Flexible WG Ku band WR75 Sq Grooved to WR75 Sq Cover 1.5M
2	Cable M&C	6M	2502041980	C/A M&C 485/ETH 12-8P to DB9 (F) 6M
		50M	2502041722	C/A M&C 485/ETH 12-8P to DB9 (F) 50M
		100M	2502042502	C/A M&C 485/ETH 12-8P to DB9 (F) 100M

ALB130 Series

Lite 8W/12W/16W Ku Band Block-Up Converter

Mounting Diagram

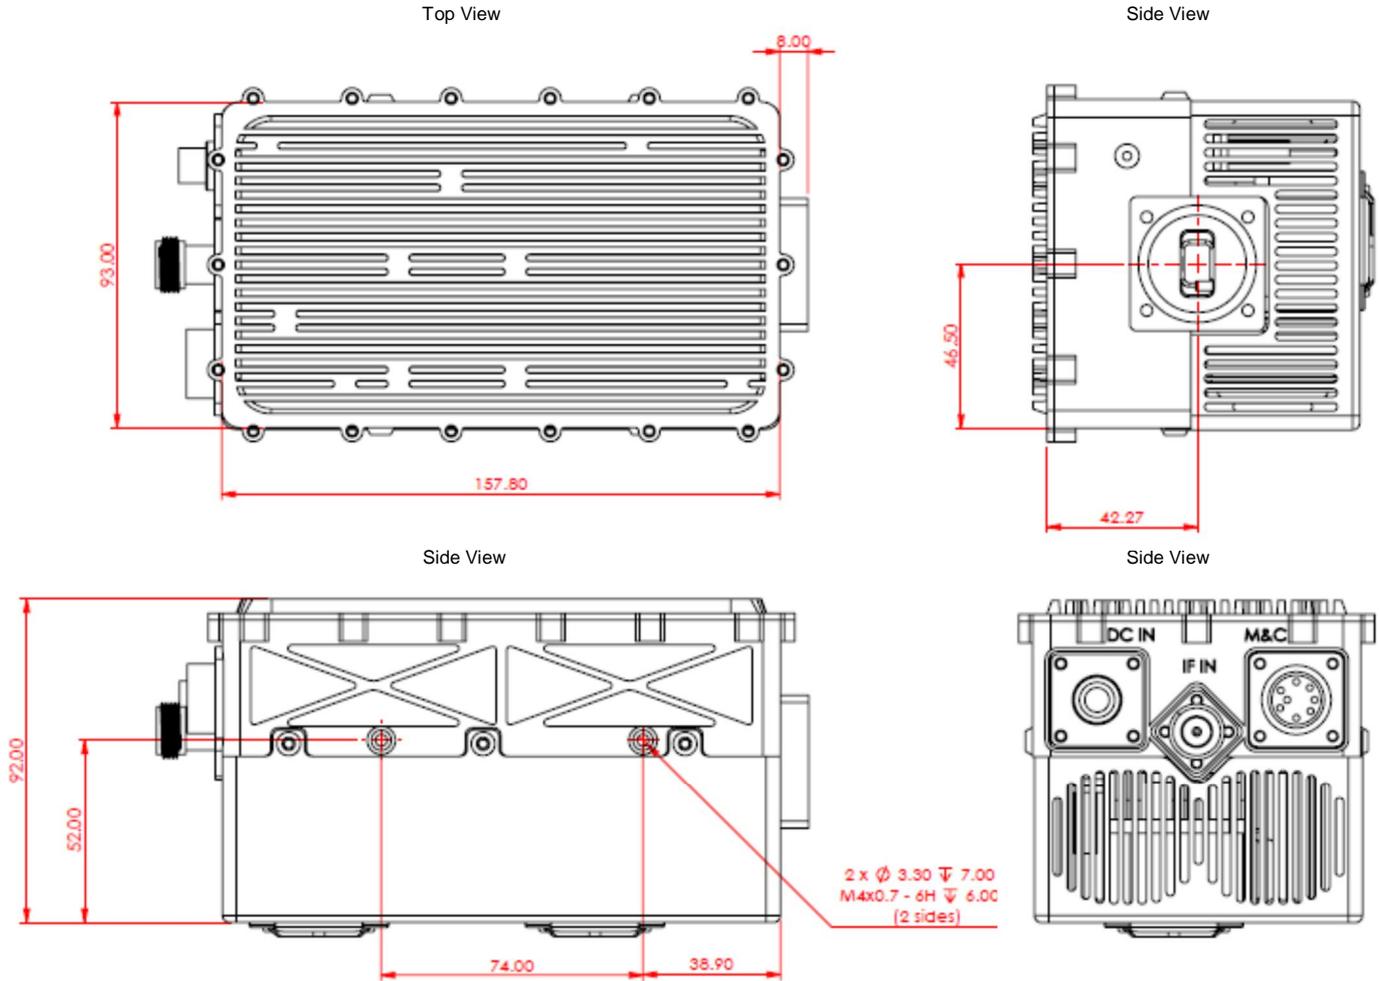

NOTE: Part list and drawing subject to change without notice
200605